

## WAVER 25W




**Applications:** Public places, Industries and Walkways.

### Specifications

Color Temperature(K)	5700- 6500K
Application	Outdoor
Mounting Type	Pole
Input Voltage	120 ~ 290 VAC
LED Viewing Angle	150° x 100°
Rated Input Power	25W
Rated Frequency	50 Hz
Luminous Efficacy	105 lm/W
Power Factor	>0.95
THD	<20%
Color Rendering Index	>70
Surge Protection	6 KV
Life Span	50,000 Hrs
Efficiency	>85%
Short Circuit Protection	Provided
Isolated Output	Provided
Open Circuit Protection	Provided
Operating Temperature	0 to 50°
IP Rating	IP65

### Material

Housing	Aluminium Die cast
Housing Color	Grey
Glass	Toughened
Optics	Polycarbonate
Weight	1 Kg
Dimension	300mm x 122mm x 37mm

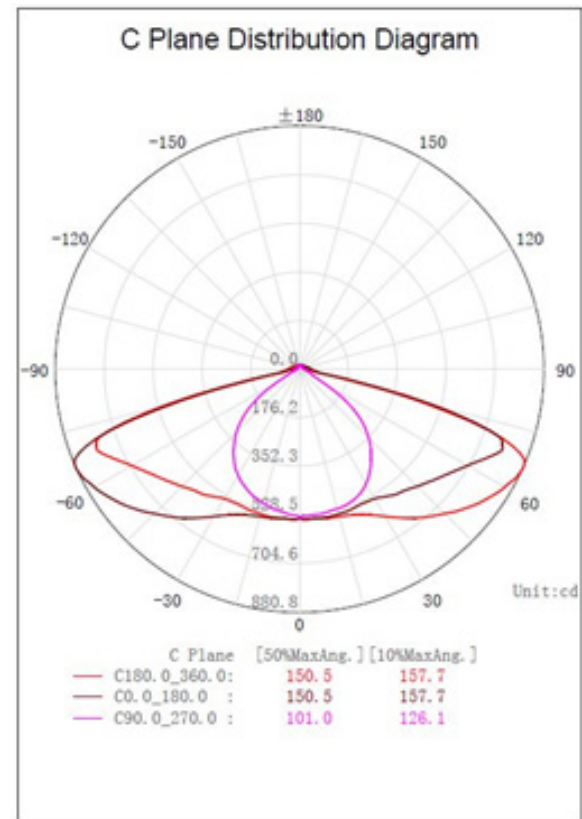

**External surge protection device up to 20 KVA can be provided at extra cost.**

## WAVER 50W



Orange+PLUS™ LED  
BRIGHTER. GREENER. SMARTER.




**Applications:** Public places, Industries and Walkways.

### Specifications

Color	Cool White
Application	Outdoor
Mounting Type	Pole
Input Voltage	120 ~ 290 VAC
LED Viewing Angle	150° x 100°
Rated Input Power	50W
Rated Frequency	50 Hz
Luminous Efficacy	104 lm/W
Power Factor	>0.95
THD	<10%
Color Rendering Index	>70
Surge Protection	10 KV
Life Span	50,000 Hrs
Efficiency	>85%
Short Circuit Protection	Provided
Isolated Output	Provided
Open Circuit Protection	Provided
Operating Temperature	0 to 50°
IP Rating	IP65

### Material

Housing	Aluminium Die cast
Housing Color	Grey
Glass	Toughened
Optics	Polycarbonate
Weight	2 Kg
Dimension	377mm x 168mm x 50mm

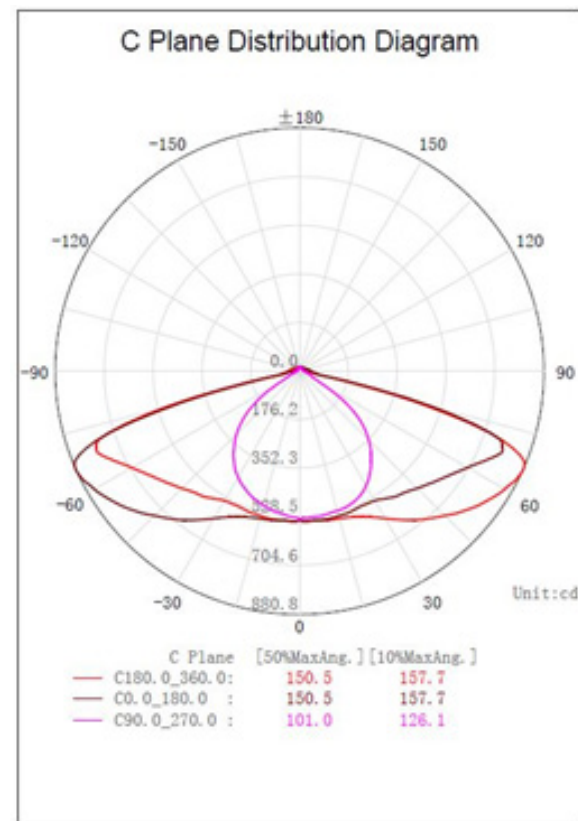

**External surge protection device up to 20 KVA can be provided at extra cost.**

## WAVER 100W




**Applications:** Public places, Industries and Walkways.

### Specifications

Color Temperature(K)	5700- 6500K
Application	Outdoor
Mounting Type	Pole
Input Voltage	120 ~ 290 VAC
LED Viewing Angle	150° x 100°
Rated Input Power	50W
Rated Frequency	50 Hz
Luminous Efficacy	104 lm/W
Power Factor	>0.95
THD	<10%
Color Rendering Index	>70
Surge Protection	10 KV
Life Span	50,000 Hrs
Efficiency	>85%
Short Circuit Protection	Provided
Isolated Output	Provided
Open Circuit Protection	Provided
Operating Temperature	0 to 50°
IP Rating	IP65

### Material

Housing	Aluminium Die cast
Housing Color	Grey
Glass	Toughened
Optics	Polycarbonate
Weight	4 Kg
Dimension	560mm x 230mm x 65mm

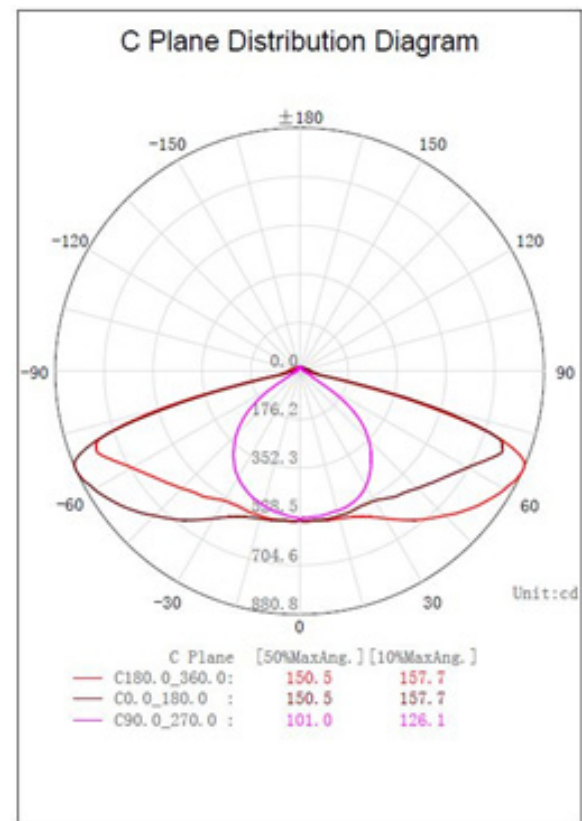

**External surge protection device up to 20 KVA can be provided at extra cost.**