

WAVER 25W




Applications: Public places, Industries and Walkways.

Specifications

| | |
|--------------------------|---------------|
| Color Temperature(K) | 5700- 6500K |
| Application | Outdoor |
| Mounting Type | Pole |
| Input Voltage | 120 ~ 290 VAC |
| LED Viewing Angle | 150° x 100° |
| Rated Input Power | 25W |
| Rated Frequency | 50 Hz |
| Luminous Efficacy | 105 lm/W |
| Power Factor | >0.95 |
| THD | <20% |
| Color Rendering Index | >70 |
| Surge Protection | 6 KV |
| Life Span | 50,000 Hrs |
| Efficiency | >85% |
| Short Circuit Protection | Provided |
| Isolated Output | Provided |
| Open Circuit Protection | Provided |
| Operating Temperature | 0 to 50° |
| IP Rating | IP65 |

Material

| | |
|---------------|----------------------|
| Housing | Aluminium Die cast |
| Housing Color | Grey |
| Glass | Toughened |
| Optics | Polycarbonate |
| Weight | 1 Kg |
| Dimension | 300mm x 122mm x 37mm |

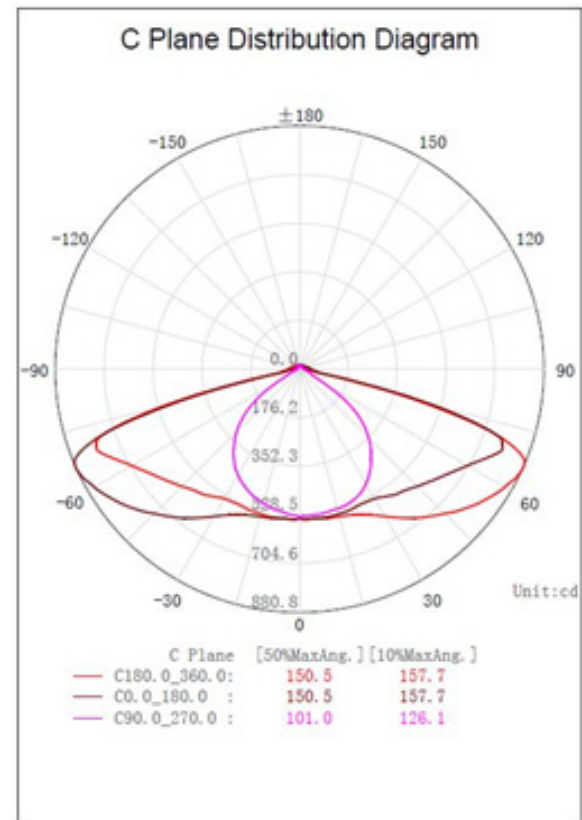

External surge protection device up to 20 KVA can be provided at extra cost.