



Model : OL-I4580-30W

Applications: Widely used in Commercial Lighting, Airports, Office Spaces, Educational Institutes, Hotels and Restaurants, Retail Shops, Showrooms and Malls, Banks.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	30W
Efficiency	>90%
Power Factor	>0.90
Harmonics	< 10%

LED Details

Mounting Type	Recess
Led Viewing Angle	120 degrees
Colour Temperature (cct)	4000k/6000k
Lumens	100 Lm/W
Luminous Flux	>3000 lm
CRI	>80

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes


Luminary Housing Details

Body	CRCA enclosure
IP Rating	IP20
Diffuser	PS


Features

- Super bright output indoor lights
- Equipped with non- flickering drivers & high lumens SMDLED chip
- Long life span up to 50k hours, low decay & low maintenance
- High grade CRCA Body with Quality powder coated surface
- Zero light leakage
- High efficiency PMMA & even light distribution
- Dimmable driver supports for all products


LUMINOUS INTENSITY DISTRIBUTION

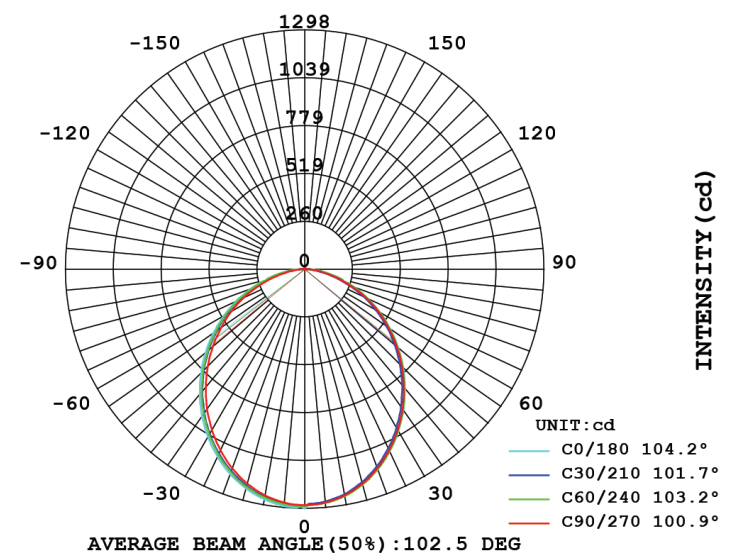

Mounting



Accessories



Optional



Dimension

145mm X 80mm X 1200mm

