



Model : OL-7290

Applications: Widely used in Commercial Lighting, Airports, Office Spaces, Educational Institutes, Hotels and Restaurants, Retail Shops, Showrooms and Malls, Banks.

Electrical Parameters	40W	80W
Input Voltage	100-285V AC	100-285V AC
Rated Power	40W (1200mm)	80W (2400mm)
Efficiency	>90%	>90%
Power Factor	>0.90	>0.90
Harmonics	< 10%	< 10%

LED Details	40W	80W
Mounting Type	Suspended	Suspended
Led Viewing Angle	120 degrees	120 degrees
Colour Temperature (cct)	4000k/6000k	4000k/6000k
Lumens	100 Lm/W	100 Lm/W
Luminous Flux	4000 lm	8000 lm
CRI	>80	>80


Protection Parameters	40W	80W
Over- Current Protection	Yes	Yes
Short- Circuit Protection	Yes	Yes
Over-Voltage Protection	Yes	Yes

Features


- Super bright output indoor lights
- Equipped with non- flickering drivers & high lumens SMDLED chip
- Long life span up to 50k hours, low decay & low maintenance
- High grade aluminium extrusion with high quality powder coating
- Screw-less ABS End caps with zero light leakage
- High efficiency PMMA & even light distribution
- Easy installation, end to end connections optional
- Dimmable driver supports for all products

NOTE: Customization possible as per requirement

Linear Continuous



LUMINOUS INTENSITY DISTRIBUTION

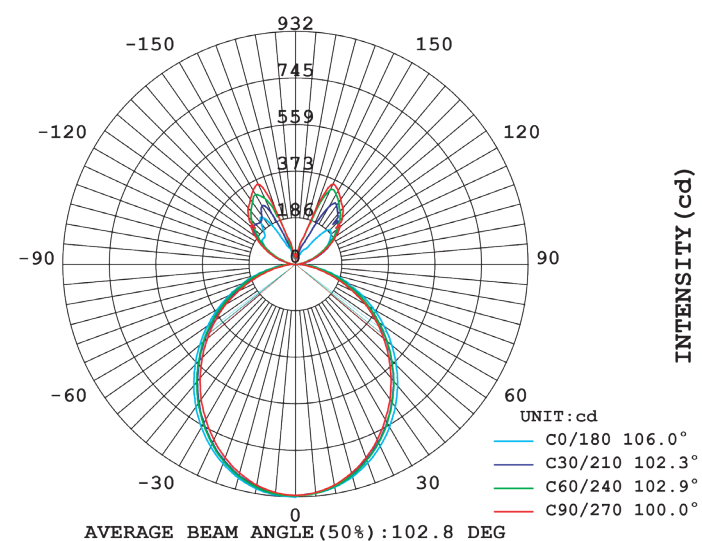


Mounting



Optional



40W Dimension 72mmx90mmx1200mm 

80W Dimension 72mmx90mmx2400mm 