



**Model : OL-PL4-36W**

**Applications:** Widely used in Offices, Hotels, Schools, Supermarkets, Shopping Malls, etc

**Electrical Parameters**

Input Voltage	100-285V AC
Rated Power	36W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<20%

**LED Details**

LED Make	BMTC SANAN 3528
No Of LED's	42
Led Viewing Angle	110 degrees
Colour Temperature (cct)	4000k/6500k
Lumens	90 Lm/ W
Luminous Flux	3240 lm
CRI	>80

**Protection Parameters**

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

**Luminary Housing Details**

Body	Aluminium with HTC plastic Frame
Heat Sink	Aluminium
Diffuser	PC Cover


**Certifications**

BIS	Tested and Approved by BIS
ROHS	Yes


**Features**

- Super bright output indoor lights
- Equipped with non- flickering drivers & high lumens SMDLED chip with lens
- Long life span up to 50k hours, low decay & low maintenance
- Trim-less ABS frame with zero light leakage
- High efficiency PMMA & even light distribution
- Easy installation - Spring fastener, Ceiling Suspension, Surface mounting and Grid mounting
- Dimmable driver supports for all products

**Installation Types**

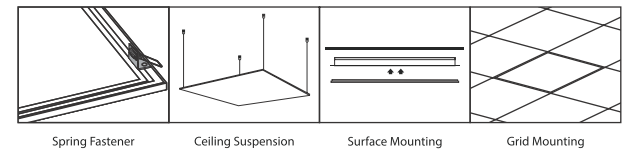

**Light distribution :-**

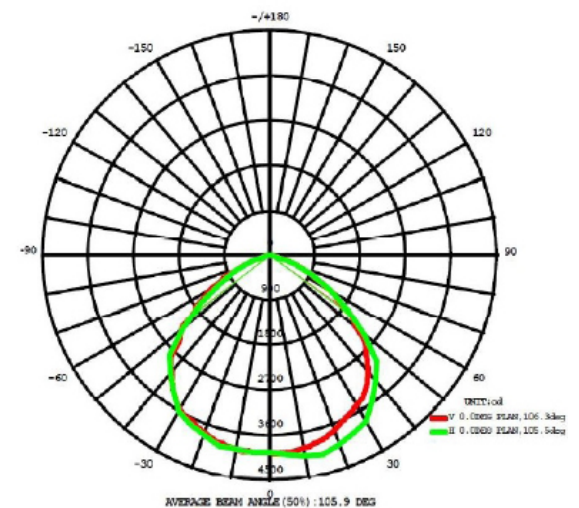

Dimension:  
300mmx1200mmx46.5mm