



Luminary Housing Details & Mounting type

Mounting Type	Recessed
Body	Aluminium Die casting
Heat Sink	Aluminium
Diffuser	Polycarbonate

Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

Model : OL-CBL-5W

Applications: Widely used in Homes, Offices, Hotels, Schools Restaurants, Supermarkets, Shopping Malls, etc.

Electrical Parameters

Input Voltage	AC 100-285V
Rated Power	5W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<20%


LED Details

Beam Angle	120° degrees
Colour Temperature (CCT)	3000K/4000K/6500K
Lumens	70 Lm/W
Luminous Flux	350 lm
CRI	>80

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

Light distribution :-

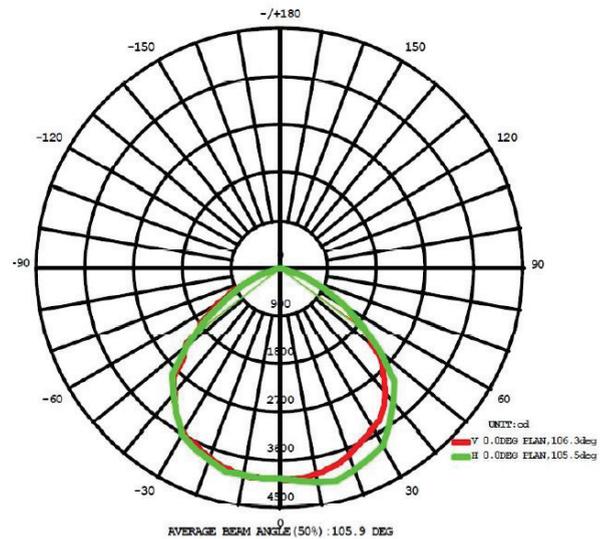


Dimension

Φ110 mm x 45mm



INSTALLATION TYPE



Suitable for 3" and 4" ceiling junction box