GLISTEN 33W

Orange PLUS™ LED
BRIGHTER. GREENER. SMARTER.

Model : OL-DL3-15W

Applications: Widely used in Homes, Offices, Hotels, Schools Restaurants, Supermarkets, Shopping Malls, etc.

Electrical Parameters	
Input Voltage	OL-DL3-33W
Rated Power	33W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<20%

LED Details	
LED Model	CREE-COB
No Of LED's	1
Beam Angle	58 degrees
Colour Temperature (cct)	3000K/4000K/6500K
Lumens	77 Lm/ W
Luminous Flux	2541 lm
CRI	>80

Protection Parameters	
Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

Luminary Housing Details & Product Dimensions	
Mounting Type	Recessed
Body	Aluminium Die casting
Heat Sink	Aluminium
Diffuser	Glass
Dimensions	Product Dia: 160mmX102mm Depth (Cutting Dia: 145mm)

Certifications	
BIS	Tested and Approved by BIS
ROHS	Yes

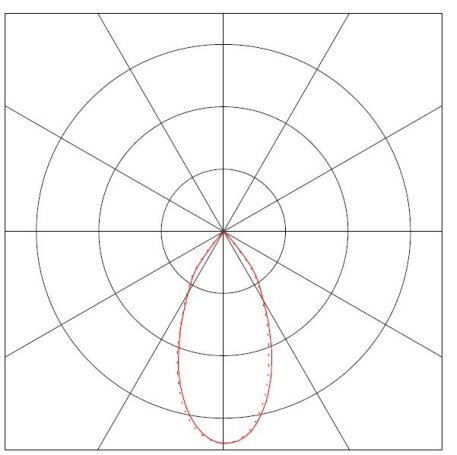

Warranty 1000 Days from the date of INVOICE.