

## GLISTEN 8W



Model : OL-DL3-8W

**Applications:** Widely used in Homes, Offices, Hotels, Schools Restaurants, Supermarkets, Shopping Malls, etc.

### Electrical Parameters

Input Voltage	AC 100-285V
Rated Power	8W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<20%

### LED Details

LED Model	CREE-COB
No Of LED's	1
Beam Angle	58 degrees
Colour Temperature (cct)	3000K/4000K/6500K
Lumens	77 Lm/W
Luminous Flux	616 lm
CRI	>80

### Protection Parameters


Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

### Luminary Housing Details & Product Dimensions

Mounting Type	Recessed
Body	Aluminium Die casting
Heat Sink	Aluminium
Diffuser	Glass
Dimensions	Product Dia: 86mmX75mm Depth (Cutting Dia: 72mm)

### Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

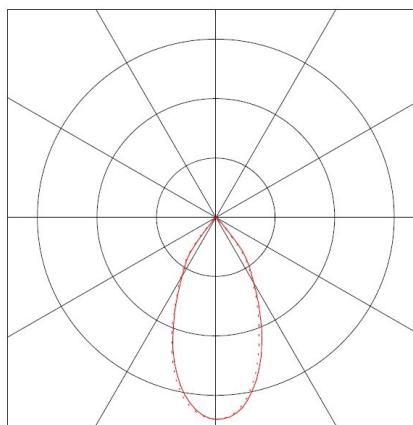

**Warranty** 1000 Days from the date of INVOICE.

## GLISTEN 15W



Model : OL-DL3-15W

**Applications:** Widely used in Homes, Offices, Hotels, Schools Restaurants, Supermarkets, Shopping Malls, etc.

### Electrical Parameters

Input Voltage	AC 100-285V
Rated Power	15W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<20%

### LED Details

LED Model	CREE-COB
No Of LED's	1
Beam Angle	58 degrees
Colour Temperature (cct)	3000K/4000K/6500K
Lumens	77 Lm/W
Luminous Flux	1150 lm
CRI	>80

### Protection Parameters


Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

### Luminary Housing Details & Product Dimensions

Mounting Type	Recessed
Body	Aluminium Die casting
Heat Sink	Aluminium
Diffuser	Glass
Dimensions	Product Dia: 110mmX91mm Depth (Cutting Dia: 95mm)

### Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

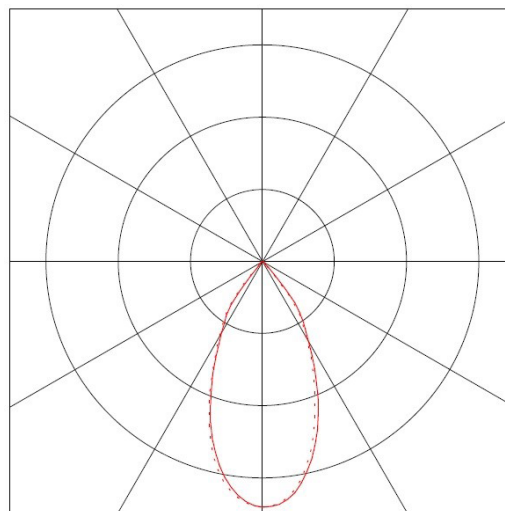

**Warranty** 1000 Days from the date of INVOICE.

## GLISTEN 23W



Model : OL-DL3-23W

**Applications:** Widely used in Homes, Offices, Hotels, Schools Restaurants, Supermarkets, Shopping Malls, etc.

### Electrical Parameters

Input Voltage	AC 100-285V
Rated Power	23W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<20%

### LED Details

LED Model	CREE-COB
No Of LED's	1
Beam Angle	58 degrees
Colour Temperature (cct)	3000K4000K/6500K
Lumens	77 Lm/W
Luminous Flux	1771 lm
CRI	>80

### Protection Parameters


Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

### Luminary Housing Details & Product Dimensions

Mounting Type	Recessed
Body	Aluminium Die casting
Heat Sink	Aluminium
Diffuser	Glass
Dimensions	Product Dia: 138mmX100mm Depth (Cutting Dia: 120mm)

### Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

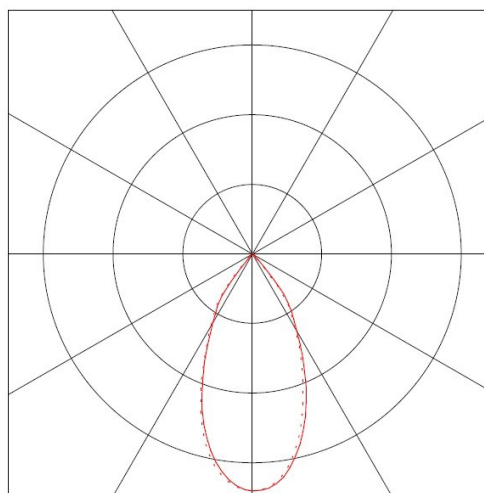

**Warranty** 1000 Days from the date of INVOICE.

## GLISTEN 33W



Model : OL-DL3-I5W

**Applications:** Widely used in Homes, Offices, Hotels, Schools Restaurants, Supermarkets, Shopping Malls, etc.

### Electrical Parameters

Input Voltage	OL-DL3-33W
Rated Power	33W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<20%

### LED Details

LED Model	CREE-COB
No Of LED's	1
Beam Angle	58 degrees
Colour Temperature (cct)	3000K/4000K/6500K
Lumens	77 Lm/W
Luminous Flux	254 l lm
CRI	>80

### Protection Parameters


Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

### Luminary Housing Details & Product Dimensions

Mounting Type	Recessed
Body	Aluminium Die casting
Heat Sink	Aluminium
Diffuser	Glass
Dimensions	Product Dia: 160mmX102mm Depth (Cutting Dia: 145mm)

### Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

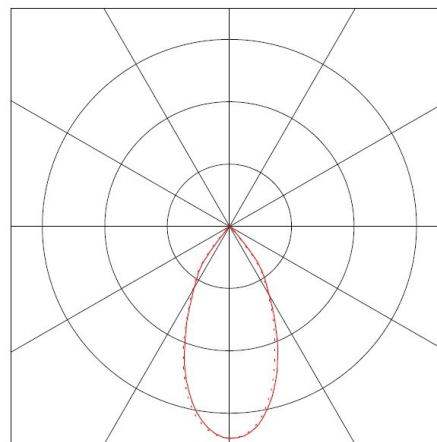

**Warranty** 1000 Days from the date of INVOICE.