

HALO - 30W



Model : OL-CIR-30W

Applications : Widely used in Homes, Offices, Hotels, Restaurants, Supermarkets, Shopping Malls, etc.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	30W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

LED Details

Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	85 Lm/ W
Luminous Flux	2550 lm
CRI	>80

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20


Luminary Housing Details

Body	CRCA
Heat Sink	Aluminium
Diffuser	PS


Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

Dimensions

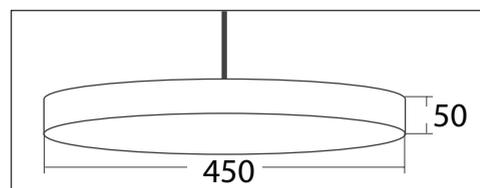

Light distribution

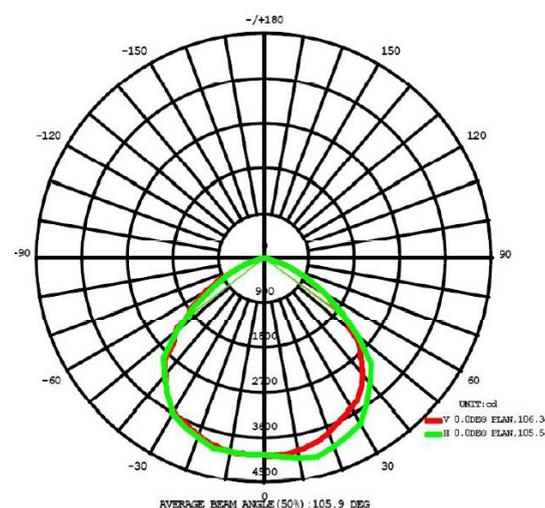

HALO - 40W



Model : OL-CIR-40W

Applications : Widely used in Homes, Offices, Hotels, Restaurants, Supermarkets, Shopping Malls, etc.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	40W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

LED Details

Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	85 Lm/W
Luminous Flux	3400 lm
CRI	>80

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20


Luminary Housing Details

Body	CRCA
Heat Sink	Aluminium
Diffuser	PS


Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

Dimensions

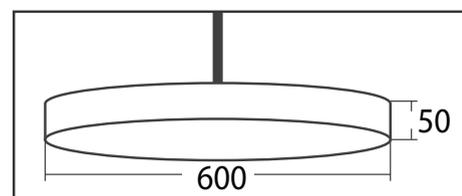

Light distribution

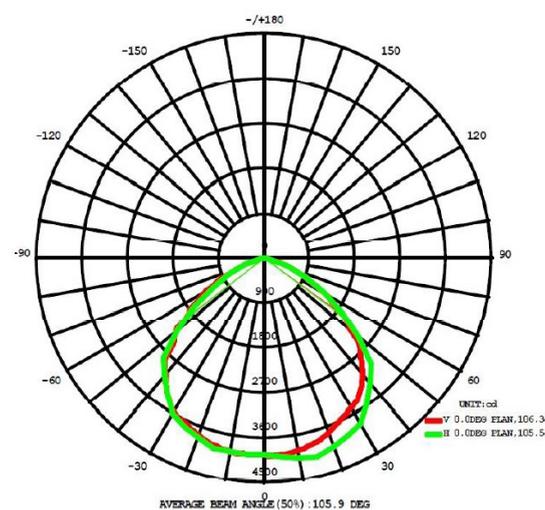

HALO - 60W



Model : OL-CIR-60W

Applications : Widely used in Homes, Offices, Hotels, Restaurants, Supermarkets, Shopping Malls, etc.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	60W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

LED Details

Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	85 Lm/W
Luminous Flux	5100 lm
CRI	>80

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20


Luminary Housing Details

Body	CRCA
Heat Sink	Aluminium
Diffuser	PS

Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

Dimensions

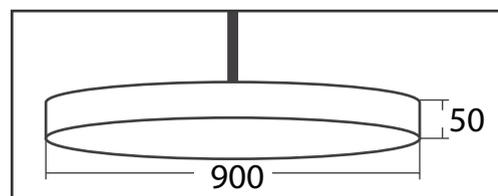

Light distribution

