

HALO - 60W



Model : OL-CIR-60W

Applications : Widely used in Homes, Offices, Hotels, Restaurants, Supermarkets, Shopping Malls, etc.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	60W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

LED Details

Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	85 Lm/W
Luminous Flux	5100 lm
CRI	>80

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20


Luminary Housing Details

Body	CRCA
Heat Sink	Aluminium
Diffuser	PS

Certifications

BIS	Tested and Approved by BIS
ROHS	Yes

Dimensions

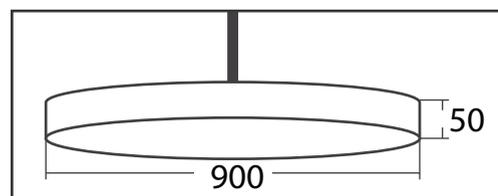

Light distribution

