

## HALO - 30W Suspended Direct/Indirect Circular Light



Model : OL-CIR2-30W

Applications : Widely used in Office spaces.

### Electrical Parameters

|               |             |
|---------------|-------------|
| Input Voltage | 100-285V AC |
| Rated Power   | 30W         |
| Efficiency    | >85%        |
| Power Factor  | >0.90       |
| Harmonics     | <15%        |

### LED Details


|                            |                   |
|----------------------------|-------------------|
| Mounting Type              | Suspended         |
| Led Viewing Angle          | 120 degrees       |
| Colour Temperature (cct)   | 3000k/4000k/6500k |
| Lumens                     | 100 Lm/ W         |
| Luminous Flux – Up Light   | 900lm             |
| Luminous Flux - Down Light | 2100 lm           |
| CRI                        | >80               |
| Led Burning Hours          | 50000 Hrs         |

### Protection Parameters

|                           |      |
|---------------------------|------|
| Over- Current Protection  | Yes  |
| Short- Circuit Protection | Yes  |
| Over-Voltage Protection   | Yes  |
| Dust And Water Protection | IP20 |

### Luminary Housing Details

|           |              |
|-----------|--------------|
| Body      | CRCA Housing |
| Heat Sink | Aluminium    |
| Diffuser  | PC Cover     |
| Dimension | Ø300 x 75mm  |

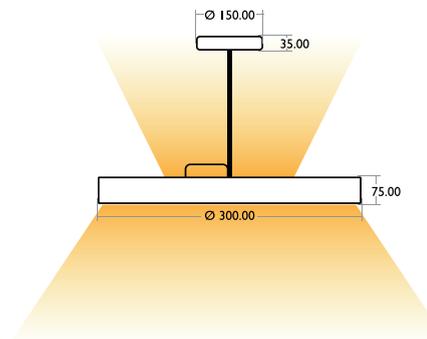

### Light distribution

