

HALO - 60W Suspended Direct/Indirect Circular Light



Model : OL-CIR2-60W

Applications : Widely used in Office spaces.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	60W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

LED Details


Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	100 Lm/ W
Luminous Flux – Up Light	1800lm
Luminous Flux - Down Light	4200 lm
CRI	>80
Led Burning Hours	50000 Hrs

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over-Voltage Protection	Yes
Dust And Water Protection	IP20

Luminary Housing Details

Body	CRCA Housing
Heat Sink	Aluminium
Diffuser	PC Cover
Dimension	Ø600 x 75mm

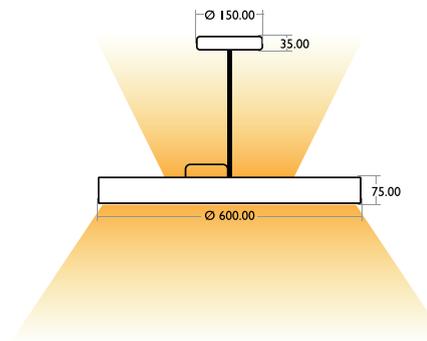

Light distribution

