

## HALO - 30W Suspended Direct/Indirect Circular Light



Model : OL-CIR2-30W

Applications : Widely used in Office spaces.

### Electrical Parameters

Input Voltage	100-285V AC
Rated Power	30W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

### LED Details


Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	100 Lm/ W
Luminous Flux – Up Light	900lm
Luminous Flux - Down Light	2100 lm
CRI	>80
Led Burning Hours	50000 Hrs

### Protection Parameters


Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

### Luminary Housing Details

Body	CRCA Housing
Heat Sink	Aluminium
Diffuser	PC Cover
Dimension	Ø300 x 75mm

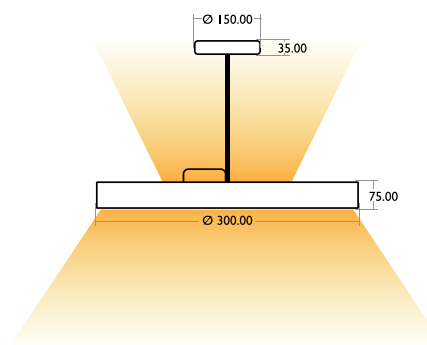

### Light distribution

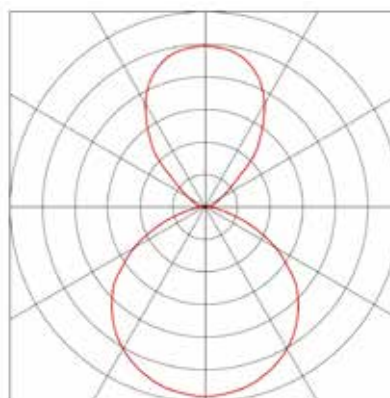

## HALO - 40W Suspended Direct/Indirect Circular Light



Model : OL-CIR2-40W

Applications : Widely used in Office spaces.

### Electrical Parameters

Input Voltage	100-285V AC
Rated Power	40W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

### LED Details


Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	100 Lm/ W
Luminous Flux – Up Light	1200lm
Luminous Flux - Down Light	2800 lm
CRI	>80
Led Burning Hours	50000 Hrs

### Protection Parameters


Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over-Voltage Protection	Yes
Dust And Water Protection	IP20

### Luminary Housing Details

Body	CRCA Housing
Heat Sink	Aluminium
Diffuser	PC Cover
Dimension	Ø450 x 75mm

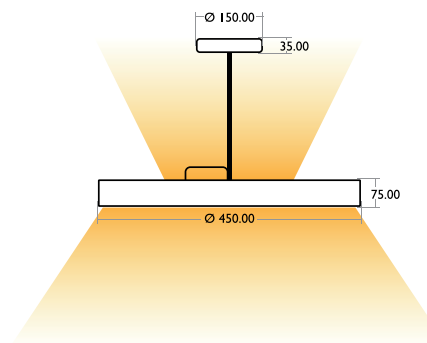

### Light distribution

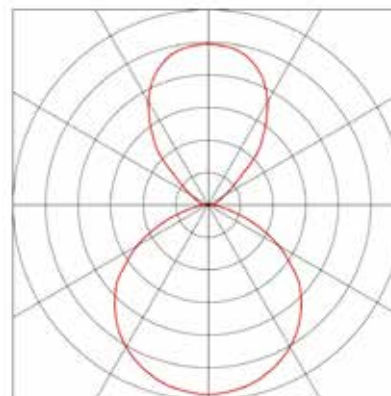

Dimming (Optional)



## HALO - 60W Suspended Direct/Indirect Circular Light



Model : OL-CIR2-60W

Applications : Widely used in Office spaces.

### Electrical Parameters

Input Voltage	100-285V AC
Rated Power	60W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

### LED Details


Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	100 Lm/ W
Luminous Flux – Up Light	1800lm
Luminous Flux - Down Light	4200 lm
CRI	>80
Led Burning Hours	50000 Hrs

### Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over-Voltage Protection	Yes
Dust And Water Protection	IP20

### Luminary Housing Details

Body	CRCA Housing
Heat Sink	Aluminium
Diffuser	PC Cover
Dimension	Ø600 x 75mm

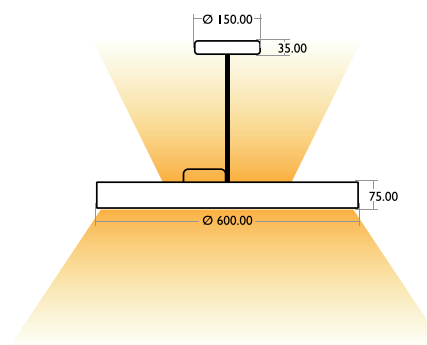

### Light distribution

